



MEDICAL GRADE SWITCHING ADAPTER

3W SWITCHING POWER ADAPTER

MEDICAL

INTERCHANGABLE

CHARGER

IT

AC Input 90~264V	DC Output		
	Voltage	Current/A	Watts
GS2x-003-zzz-A	5~5.9	0.6~0.5	3
	6~6.9	0.5~0.43	3
	7~7.9	0.42~0.37	3
	8~8.9	0.37~0.33	3
	9~9.9	0.33~0.3	3
	10~10.9	0.3~0.27	3
	12~12.9	0.25~0.23	3
	13~13.9	0.23~0.21	3
	14~14.9	0.21~0.2	3
	15~15.9	0.2~0.18	3
	24	0.12	3

ELECTRICAL SPECIFICATION

- Input range : 90-264VAC (Full Range)
- Frequency : 50/60Hz
- Input current ; 0,2 A(rms)MAX.
- Efficiency : >60% (at full output)
- Leakage current:Less than 0.1 mA
- No Load : 0,3W Max
- Ripple : 1 % peak to peak maximum
- Protection :Over voltage protection (OVP),
AC recycle short circuit protection;
Output short circuit protection (<0.03 ohm) Auto recovery

ENVIRONMENTAL

- Operating temperature: 0°C to +40°C ambient
- Storage temperature: -10°C to +70°C
- MTBF : >100,000 hours at full load and 25°C ambient temperature

SAFETY

- UL60601-1 CAN / CSA-C22.2 TUV EN60601-1 CB LVD

EMC


- EN55011 CISPR 11 FCC PART 15 (Class B)




Safety Approval FC



Safety Approval CE

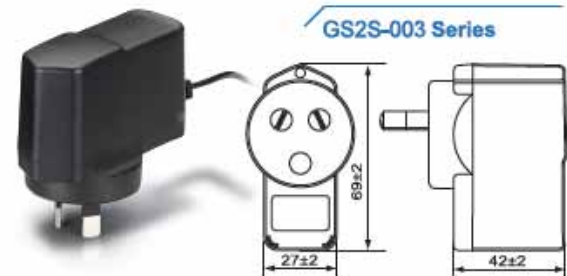

Safety Approval CE CB

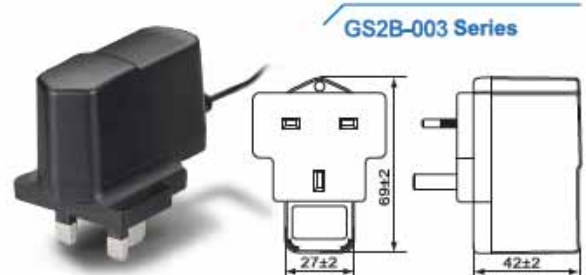

Safety Approval CE CB