



MEDICAL GRADE SWITCHING ADAPTER



15W SWITCHING POWER ADAPTER

AC Input 90~264V	DC Output		
	Voltage	Current/A	Watts
GS2x-015-yyy-a	5~8	3.0~1.87	15
	8~11	1.87~1.36	15
	11~15	1.36~1.0	15
	15~20	1.0~0.75	15
	20~24	0.75~0.62	15

ELECTRICAL SPECIFICATION

- Input range : 90-264VAC(Full Range)
- Frequency : 50/60Hz
- Input current : 0,5A Max.
- Efficiency : > 73% (at full output)
- Output voltage : See rating chart
- Output current : See rating chart
- Leakage current:Less than 0.1 mA
- No Load : 0.3W Max
- Ripple : 1% peak to peak maximum
- Protection : Over current protection(OCP) ,
AC recycle short circuit protection:

ENVIRONMENTAL


- Operating temperature: 0°C to +40°C ambient
- Storage temperature: -20°C~60°C
- MTBF : >100,000 hours at full load and 25°C
Ambient temperature.

SAFETY


- (A) UL60601-1 CAN/CSA-C22,2
- (B) EN60601-1 CB IEC 60601-1

EMI


- EN55011 FCC 47 CFR Part 15 Subpart B

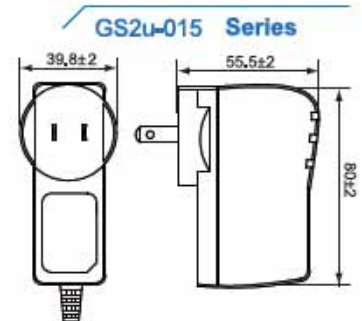


Safety Agency Approvals: UL FCC CB

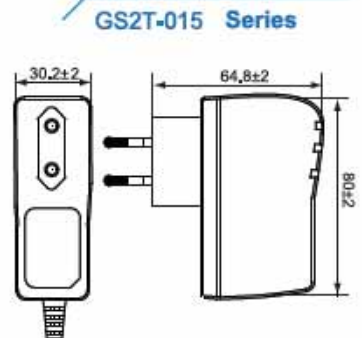

Safety Agency Approvals: UL CE CB

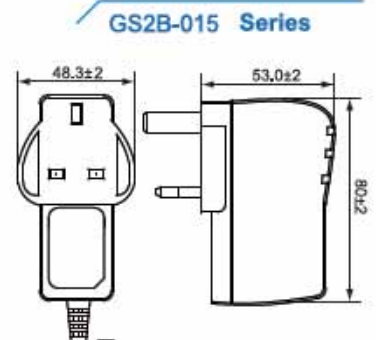

Safety Agency Approvals: UL CE CB

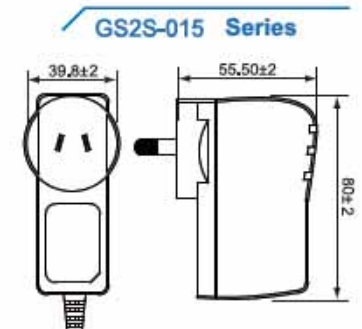

Safety Agency Approvals: UL CE CB

MEDICAL

INTERCHANGEABLE

CHARGER

IT