

## 10W SWITCHING POWER ADAPTER

AC Input 90~264V	DC Output		
	Output Voltage	Output Current	Watts/MAX
GS2W-010-xxx	5~8	1.25~2.0	10
	9~14	0.71~1.1	10
	15~19	0.52~0.66	10
	20~24	0.41~0.5	10

### ELECTRICAL SPECIFICATION

- Input range : 90-264VAC (Full Range)
- Frequency : 50/60Hz
- Input current : 0,3 A rms(Max)
- Efficiency : >70%
- Leakage current: Less than 0.25 mA
- No Load : 0.3W Max
- Output voltage : See rating chart
- Output current : See rating chart
- Ripple & Noise : 1% peak to peak maximum
- Protection : Over Current protection(OCP),  
AC recycle short circuit protection;  
Output short circuit protection (<0.03 ohm) Auto recovery

### ENVIRONMENTAL

- Operating temperature: 0°C to +40°C ambient
- Storage temperature: -10°C to +70°C
- MTBF : >100,000 hours at full load and 25°C ambient Temperature.

### SAFETY

- UL 60950-1 CSA C22.2 TUV60950-1/ EN 60950-1; J60950(H19)
- CNS13438; CNS14336; CB IEC 60950-1; BS/EN 60950-1

### EMI

- EN 55022 / CISPR FCC PART 15B; J55022(H20)
- EN 55024

GS2u(J)-010 Series




Safety Approval FC

GS2T-010 Series



Safety Approval FC CB

GS2S-010 Series

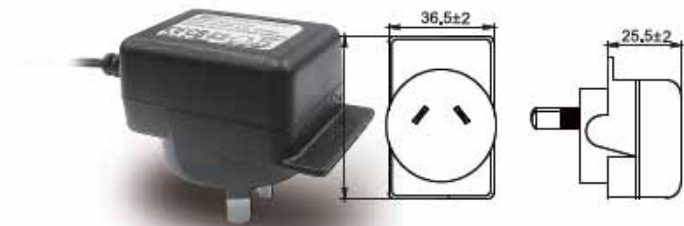

Safety Approval CE CB

GS2B-010 Series



Safety Approval CE CB

MEDICAL

INTERCHANGEABLE

CHARGER

I.T.E